


Compatibile con:
Interchangeability:



EHM 2500/10
EHM 2500/15
EHM 2500/25
EHM 2500/35
EPHM 2500/10
EPHM 2500/15
EPHM 2500/25
EPHM 2500/35
EHP 1200
EHP 1500

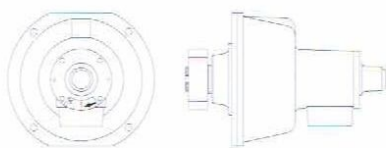

Freno d'emergenza
ad arresto progressivo
*Overspeed safety device
with progressive stop*

EHPM 2500/25 colonna rettangolare
EHM 2500/25 colonna rettangolare



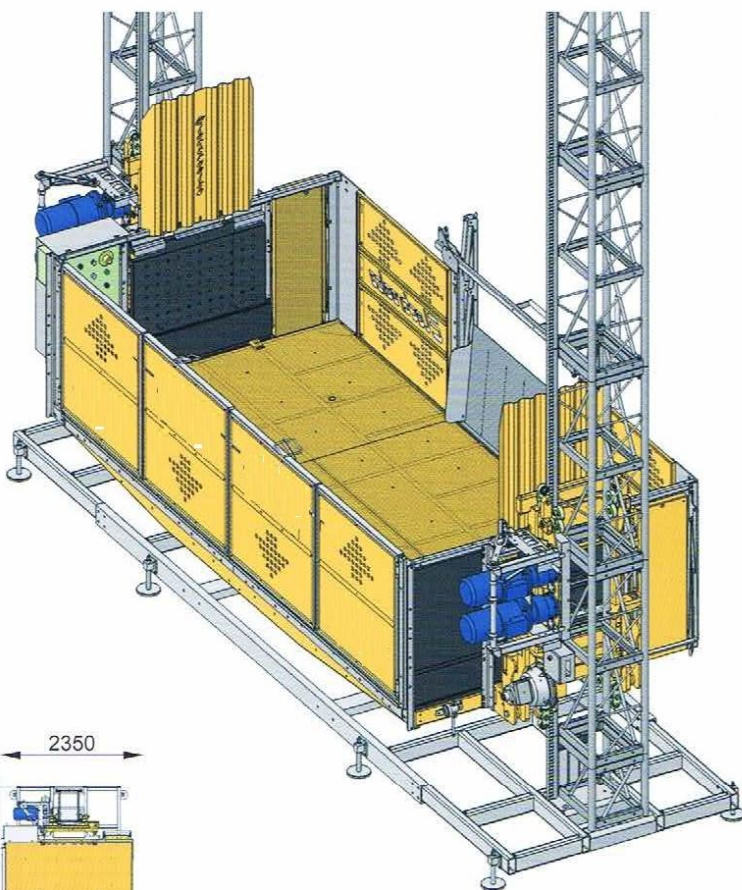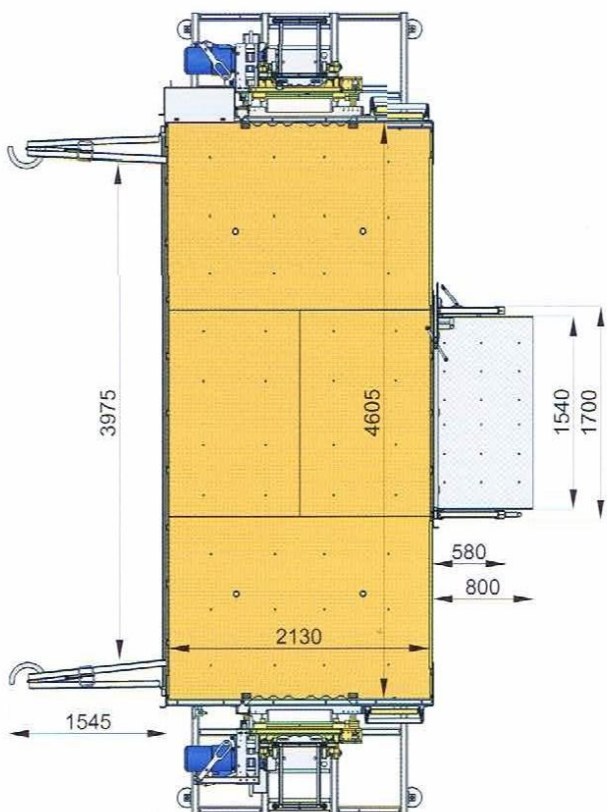

	2500 kg trifase	EHM
♣	+2400 kg	EHPM
♣♣	+2300 kg	
♣♣♣	+2200 kg	
♣♣♣♣	+2100 kg	
♣♣♣♣♣	+2000 kg	
♣♣♣♣♣♣	+1900 kg	
♣♣♣♣♣♣♣	+1800 kg	
♣♣♣♣♣♣♣♣	+1700 kg	

PIATTAFORMA DI TRASPORTO / MONTACARICHI
TRANSPORT PLATFORM / MATERIAL HOIST

Dati tecnici	Technical Data	Données Techniques	Datos Tecnicos	EHPM 2500/25 trifase	EHM 2500/25 trifase
Capacità di carico	Capacity	Charge Nominale	Capacidad de carga	2500 kg	2500 kg
Velocità di sollevamento	Lifting speed	Vitesse de lévage	Velocidad de elevación	12 m/min	12 m/min
Massima altezza ancorata	Max anchored height	Hauter max avec ancrages	Altura max con anclajes	120 m	120 m
Dimensioni interne cesta	Platform dimensions	Dimensions du plancher	Dimensiones de cabina	4,70 x 2,14 m	4,70 x 2,14 m
Tensione alimentazione	Input power range	Tension d'alimentation	Tensión de red	380/415 V 50/60 Hz	380/415 V 50/60 Hz
Interruttore protezione linea	Protection switch	Interrupteur de protection	Interruptor de protección	32 A	32 A
Potenza servizio continuo	Power of the motors	Puissance des moteurs	Potencia de motorreductores	4 x 3 kW	4 x 3 kW
Corrente di spunto	Starting current	Ampérage au démarrage	Intensidad de arranque	180 A	180 A
Minima potenza di linea consigliata	Minimum line power suggested	Min. puissance de ligne conseillée	Min. potencia de linea	20 kW	20 kW