

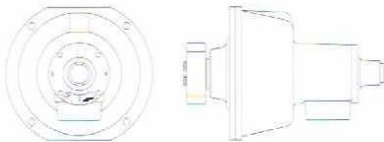


Compatibile con:
Interchangeability:

- EHM 900
- EHM 1200
- EHM 2500/15
- EHM 2500/25
- EHPM 900
- EHPM 1200
- EHPM 2500/15
- EHPM 2500/25
- EHP 400
- EHP 800



Freno d'emergenza
ad arresto progressivo
*Overspeed safety device
with progressive stop*





Otto vitoni di livellamento
Four levelling screw-jacks

EHPM 2500/25 colonna triangolare

EHM 2500/25 colonna triangolare



EHPM 2500/25 colonna triangolare
EHM 2500/25 colonna triangolare

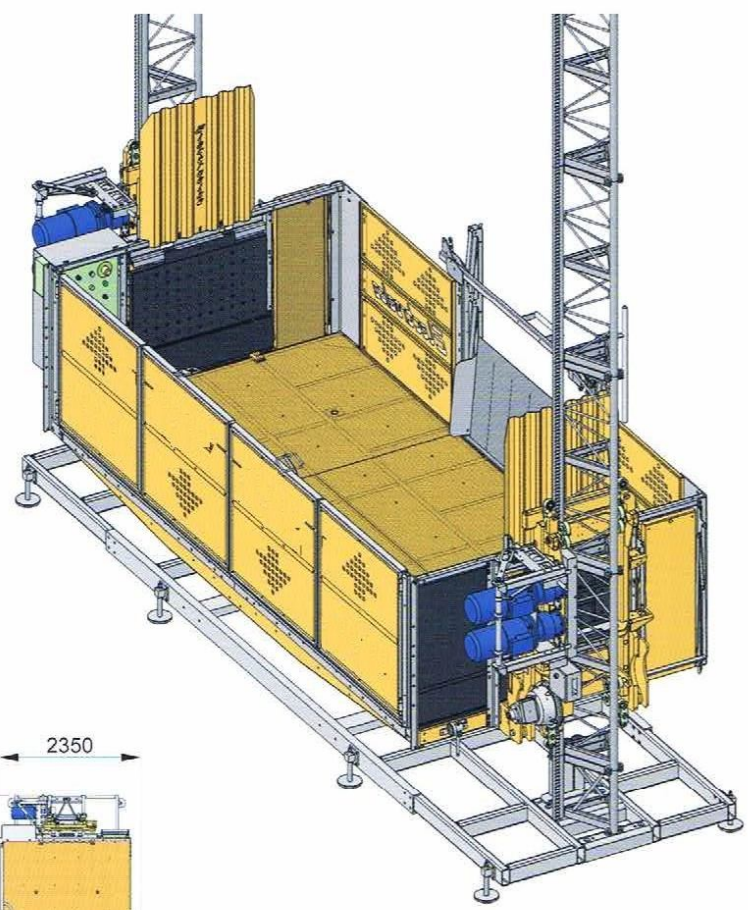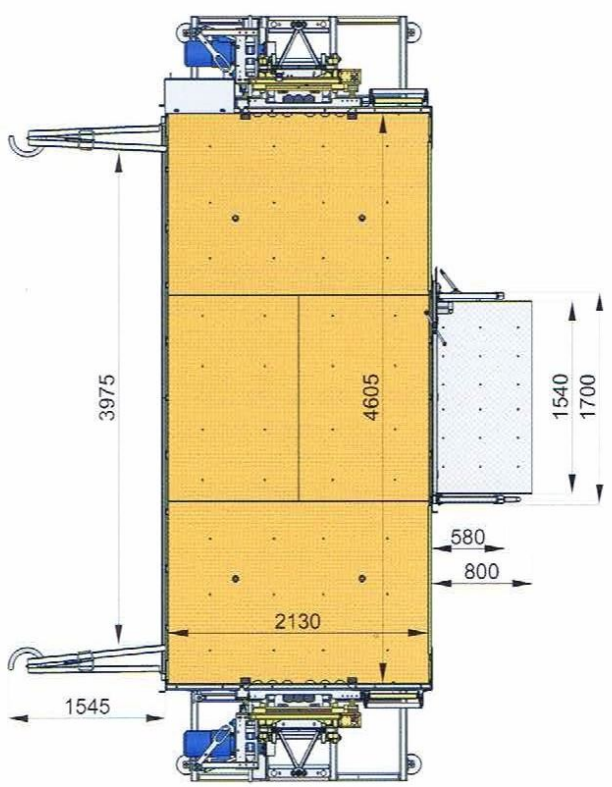

	2500 kg trifase	EHM
↑	+2400 kg	EHPM
↑↑	+2300 kg	
↑↑↑	+2200 kg	
↑↑↑↑	+2100 kg	
↑↑↑↑↑	+2000 kg	
↑↑↑↑↑↑	+1900 kg	
↑↑↑↑↑↑↑	+1800 kg	
↑↑↑↑↑↑↑↑	+1700 kg	

PIATTAFORMA DI TRASPORTO / MONTACARICHI
TRANSPORT PLATFORM / MATERIAL HOIST

Dati tecnici	Technical Data	Données Techniques	Datos Tecnicos	EHPM 2500/25 trifase	EHM 2500/25 trifase
Capacità di carico	Capacity	Charge Nominale	Capacidad de carga	2500 kg	2500 kg
Velocità di sollevamento	Lifting speed	Vitesse de lévage	Velocidad de elevación	12 m/min	12 m/min
Massima altezza ancorata	Max anchored height	Hauter max avec ancrages	Altura max con anclajes	120 m	120 m
Dimensioni interne cesta	Platform dimensions	Dimensions du plancher	Dimensiones de cabina	4,70 x 2,14 m	4,70 x 2,14 m
Tensione alimentazione	Input power range	Tension d'alimentation	Tensión de red	380/415 V 50/60 Hz	380/415 V 50/60 Hz
Interruttore protezione linea	Protection switch	Interrupteur de protection	Interruptor de protección	32 A	32 A
Potenza servizio continuo	Power of the motors	Puissance des moteurs	Potencia de motorreductores	4 x 3 kW	4 x 3 kW
Corrente di spunto	Starting current	Ampérage au démarrage	Intensidad de arranque	180 A	180 A
Minima potenza di linea consigliata	Minimum line power suggested	Min. puissance de ligne conseillée	Min. potencia de linea	20 kW	20 kW

