
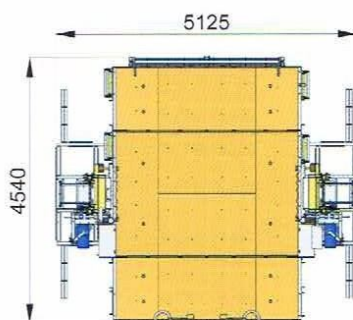
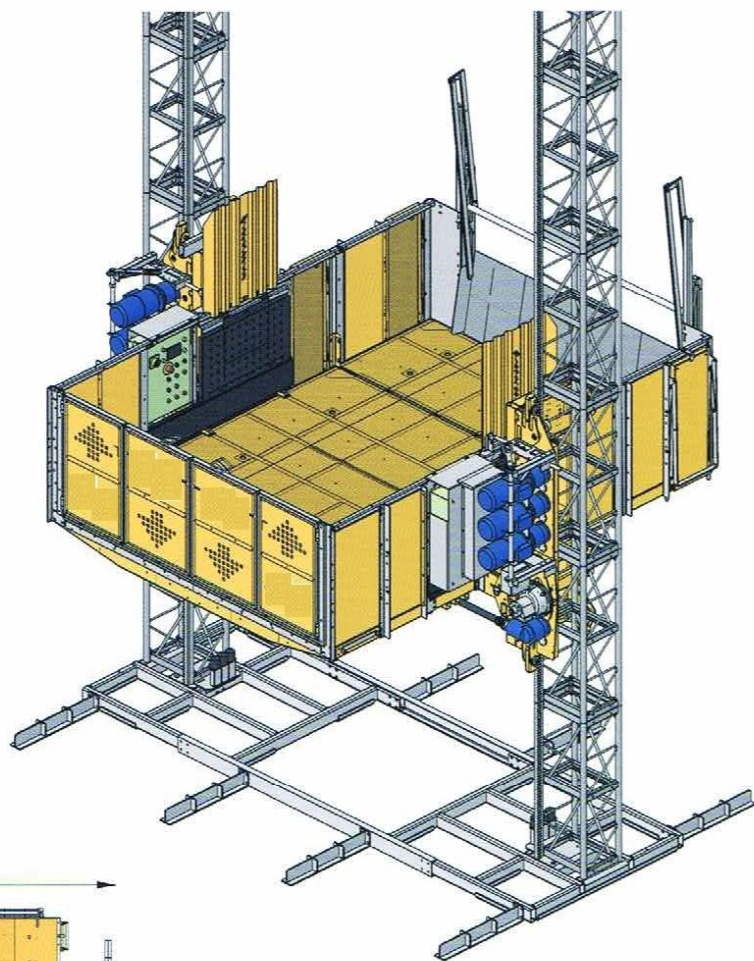



EHPM 2500/35
EHM 2500/35

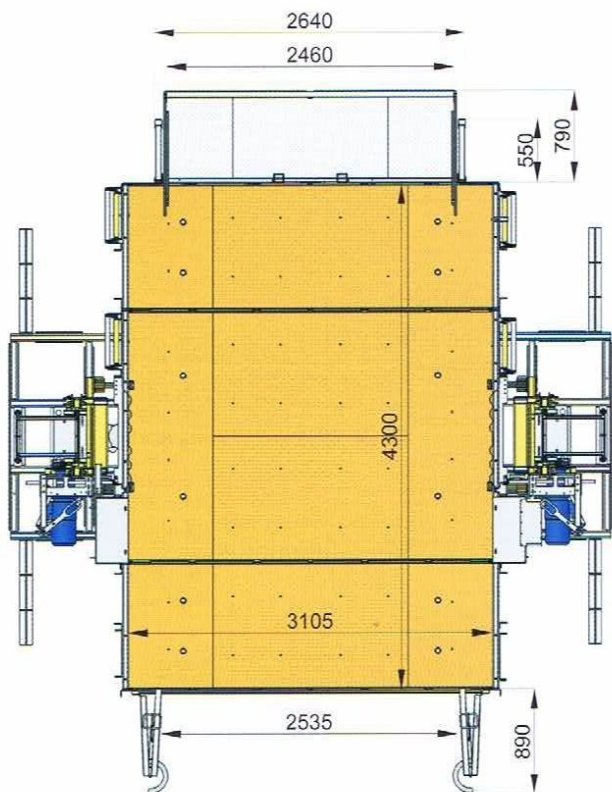

	3500 kg trifase	EHM
♂	+3400 kg	EHPM
♂♂	+3300 kg	
♂♂♂	+3200 kg	
♂♂♂♂	+3100 kg	
♂♂♂♂♂	+3000 kg	
♂♂♂♂♂♂	+2900 kg	
♂♂♂♂♂♂♂	+2800 kg	
♂♂♂♂♂♂♂♂	+2700 kg	



PIATTAFORMA DI TRASPORTO / MONTACARICHI
TRANSPORT PLATFORM / MATERIAL HOIST

Dati tecnici	Technical Data	Données Techniques	Datos Tecnicos	EHPM 2500/35 trifase	EHM 2500/35 trifase
Capacità di carico	Capacity	Charge Nominale	Capacidad de carga	3500 kg	3500 kg
Velocità di sollevamento	Lifting speed	Vitesse de lévage	Velocidad de elevación	12 m/min	20 m/min
Massima altezza ancorata	Max anchored height	Hauter max avec ancrages	Altura max con anclajes	120 m	120 m
Dimensioni interne cesta	Platform dimensions	Dimensions du plancher	Dimensiones de cabina	4,20 x 3,20 m	4,20 x 3,20m
Tensione alimentazione	Input power range	Tension d'alimentation	Tensión de red	380/440 V 50/60 Hz	380/440 V 50/60 Hz
Interruttore protezione linea	Protection switch	Interrupteur de protection	Interruptor de protección	50 A	50 A
Potenza servizio continuo	Power of the motors	Puissance des moteurs	Potencia de motorreductores	6 x 4 kW	6 x 4 kW
Corrente di spunto	Starting current	Ampérage au démarrage	Intensidad de arranque	320 A	320 A
Minima potenza di linea consigliata	Minimum line power suggested	Min. puissance de ligne conseillée	Min. potencia de linea	30 kW	30 kW
Limitatore di carico	Overload	Limiteur de charge	Limitador de carga	✓	✓

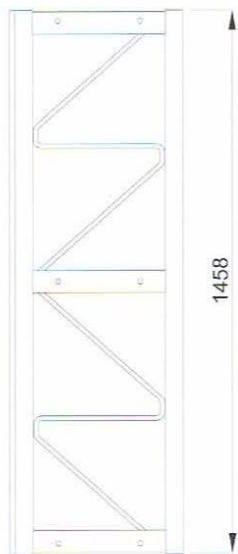

Compatibile con:
Interchangeability:

- EHM 2500/10
- EHM 2500/15
- EHM 2500/25
- EHM 2500/35
- EPHM 2500/10
- EPHM 2500/15
- EPHM 2500/25
- EPHM 2500/35
- EHP 1200
- EHP 1500

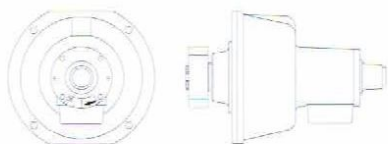

Freno d'emergenza
ad arresto progressivo
*Overspeed safety device
with progressive stop*

EHPM 2500/35

EHM 2500/35

